


Lag Screws

Steel, Stainless &
Hot-Dip Galvanized

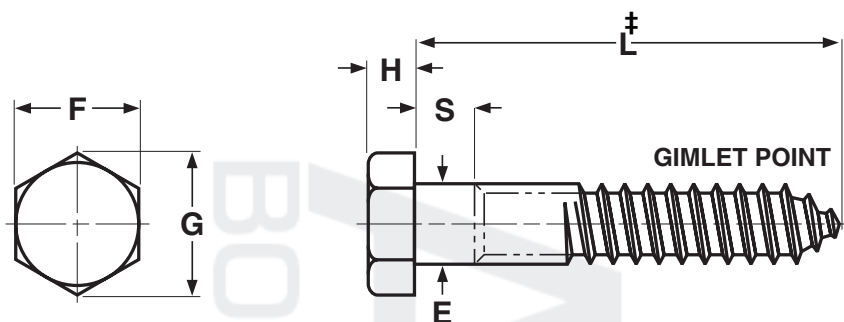

HEX LAG SCREWS

ASME B18.2.1-
1996

Basic Product Diameter		Threads Per Inch	E		F			G		H			S
			Body or Shoulder Diameter		Width Across Flats			Width Across Corners		Head Height			Shoulder Length
			Max	Min	Basic	Max	Min	Max	Min	Basic	Max	Min	Min
No. 10	0.1900	11	0.199	0.178	9/32	0.281	0.271	0.323	0.309	1/8	0.140	0.110	0.094
1/4	0.2500	10	0.260	0.237	7/16	0.438	0.425	0.505	0.484	11/64	0.188	0.150	0.094
5/16	0.3125	9	0.324	0.298	1/2	0.500	0.484	0.577	0.552	7/32	0.235	0.195	0.125
3/8	0.3750	7	0.388	0.360	9/16	0.562	0.544	0.650	0.620	1/4	0.268	0.226	0.125
7/16	0.4375	7	0.452	0.421	5/8	0.625	0.603	0.722	0.687	19/64	0.316	0.272	0.156
1/2	0.5000	6	0.515	0.482	3/4	0.750	0.725	0.866	0.826	11/32	0.364	0.302	0.156
5/8	0.6250	5	0.642	0.605	15/16	0.938	0.906	1.083	1.033	27/64	0.444	0.378	0.312
3/4	0.7500	4-1/2	0.768	0.729	1-1/8	1.125	1.088	1.299	1.240	1/2	0.524	0.455	0.375
7/8	0.8750	4	0.895	0.852	1-5/16	1.312	1.269	1.516	1.447	37/64	0.604	0.531	0.375
Tolerance on Length													
Tolerance on Length		Nominal Screw Size				Nominal Screw Length							
						Thru 6 in.				Over 6 in.			
						1/2 and smaller				±0.12			
						Over 1/2				±0.25			

‡Length of a lag screw is measured from the underhead bearing surface to the extreme end of the screw.

Description	A full-bodied bolt with hex head, spaced threads and a gimlet point.
Applications/Advantages	Steel, Electro-plated Zinc: For use in wood in non-corrosive environments. Steel, Hot-Dip Galvanized: For use in corrosive environments. Stainless: Has superior corrosion resistance to galvanized steel bolts.
Material	Steel: AISI 1006 - 1022 or equivalent steel. Stainless: 18-8 stainless.
Heat Treatment	Stainless: The austenitic alloys develop their strength through work hardening during the fastener manufacturing process, as seen from the hardness properties below. The only heat treatment normally available on austenitic stainless alloys is annealing, which is done at approximately 1900°F to a dead soft condition and is not normally thermally reversible.
Hardness	Steel: Rockwell B70 - B100. Stainless: 1/4 through 1/2 in. diameter-- Rockwell B95 - C32.
Tensile Strength	Steel: 60,000 psi. minimum Stainless: 100,000 - 125,000 psi. (approximate)
Minimum Thread Length	The minimum length of thread shall be equal to 1/2 the nominal screw length plus 0.50 in., or 5.00 in., whichever is shorter. Screws too short for this formula shall be threaded as close to the head as practicable.