


TAPERED PINS

785-392-3017 FAX 785.392.2845

REVISED 06-04
www.huyett.com

1/4" TAPER PER FOOT




STANDARD


MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
-----------	---------	----------	---------

See also	AN385
----------	-------

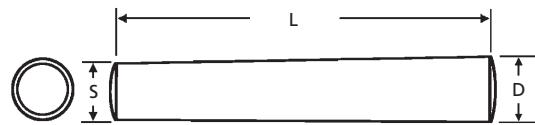

TP	Number	Length (L)	Nominal Diameter (D)	WEIGHT		MATERIAL	
				NUMBER	LENGTH	Lbs. per 100 Pieces	Plain "TP-"
-70-0250	7/0	1/4	1/16	.058	.13		
-70-0375		3/8		.055	.14		
-70-0500		1/2		.053	.16		
-70-0625		5/8		.050	.18		
-70-0750		3/4		.047	.20		
-70-0875		7/8		.045	.22		
-70-1000		1		.042	.25		
-70-1250		1-1/4		.037	.30		
-70-1500		1-1/2		.032	.34		
-60-0250	6/0	1/4	5/64	.073	.14		
-60-0375		3/8		.070	.16		
-60-0500		1/2		.068	.18		
-60-0625		5/8		.065	.21		
-60-0750		3/4		.062	.23		
-60-0875		7/8		.060	.25		
-60-1000		1		.057	.28		
-60-1250		1-1/4		.052	.34		
-60-1500		1-1/2		.047	.39		
-50-0250	5/0	1/4	3/32	.089	.16		
-50-0375		3/8		.086	.18		
-50-0500		1/2		.084	.21		
-50-0625		5/8		.081	.23		
-50-0750		3/4		.078	.26		
-50-0875		7/8		.076	.28		
-50-1000		1		.073	.32		
-50-1250		1-1/4		.068	.38		
-50-1500		1-1/2		.063	.43		
-40-0250	4/0	1/4	7/64	.104	.18		
-40-0375		3/8		.101	.21		
-40-0500		1/2		.099	.23		
-40-0625		5/8		.096	.26		
-40-0750		3/4		.093	.29		
-40-0875		7/8		.091	.32		
-40-1000		1		.088	.36		
-40-1250		1-1/4		.083	.42		
-40-1500		1-1/2		.078	.49		
-40-1750		1-3/4		.073	.54		
-40-2000		2		.067	.60		
-40-2250		2-1/4		.062	.81		

TP	DESCRIPTION	GENERAL USE	HOW TO IDENTIFY	APPLICATION
STANDARD	Solid cylindrical pin that has a uniform taper that runs the entire length of the pin. Tapered pins are held into place with dry friction making them easy to install and cost effective.	COMMON	<ol style="list-style-type: none"> Verify solid pin with uniform 1/4" taper. Measure diameter (D). Measure length (L). Find the part in the chart above. <p>TYPICAL PART NUMBER SEQUENCE: TP-70-0250 is a #7/0 x 1/4" plain tapered pin.</p>	 Commonly used in clock mechanisms.

PERFORMANCE RESULTS VARY. YOUR PIN SELECTION SHOULD BE MADE BASED ON INDIVIDUAL APPLICATION.



ASSORTMENTS BEGIN

Page 286



TPM

METRIC


Page 276

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS

166

All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.

© G.L. Huyett 2004

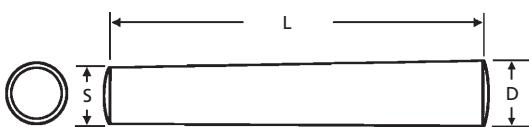

STANDARD

MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
See also	AN385		



TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT		MATERIAL
					Lbs. per 100 Pieces	Plain "TP-"	
-40-2500	4/0	2-1/2	7/64	.057	.90		
-40-2750		2-3/4		.052	.99		
-40-3000		3		.047	1.08		
-30-0250	3/0	1/4		.120	.20		
-30-0375		3/8		.117	.23		
-30-0500		1/2		.115	.26		
-30-0625		5/8		.112	.29		
-30-0750		3/4		.109	.32		
-30-0875		7/8		.107	.36		
-30-1000		1		.104	.40		
-30-1250	2/0	1-1/4	1/8	.099	.48		
-30-1500		1-1/2		.094	.55		
-30-1750		1-3/4		.089	.61		
-30-2000		2		.083	.67		
-30-2250		2-1/4		.078	.91		
-30-2500		2-1/2		.073	1.01		
-30-2750		2-3/4		.068	1.11		
-30-3000		3		.063	1.21		
-30-3250		3-1/4		.057	1.31		
-20-0500	0	1/2	9/64	.131	.29		
-20-0625		5/8		.128	.33		
-20-0750		3/4		.125	.36		
-20-0875		7/8		.123	.40		
-20-1000		1		.120	.45		
-20-1250		1-1/4		.115	.53		
-20-1500		1-1/2		.110	.61		
-20-1750		1-3/4		.105	.69		
-20-2000		2		.099	.76		
-20-2250		2-1/4		.094	1.02		
-20-2500	0	2-1/2	5/32	.089	1.14		
-20-2750		2-3/4		.084	1.25		
-20-3000		3		.079	1.36		
-20-3250		3-1/4		.073	1.48		
-20-3500		3-1/2		.068	1.59		
-20-3750		3-3/4		.063	1.70		
-00-0500		1/2		.146	.33		
-00-0625		5/8		.143	.37		
-00-0750		3/4		.140	.41		
-00-0875		7/8		.138	.45		
-00-1000		1		.135	.51		
-00-1250	0	1-1/4	5/32	.130	.60		
-00-1500		1-1/2		.125	.69		
-00-1750		1-3/4		.120	.77		
-00-2000		2		.114	.85		
-00-2250		2-1/4		.109	1.15		
-00-2500		2-1/2		.104	1.28		
-00-2750		2-3/4		.099	1.40		
-00-3000		3		.094	1.53		
-00-3250		3-1/4		.088	1.66		
-00-3500		3-1/2		.083	1.79		
-00-3750		3-3/4		.078	1.91		
-00-4000		4		.073	2.04		

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS


All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.

TAPERED PINS

785-392-3017 FAX 785.392.2845

REVISED 06-04
www.huyett.com


1/4" TAPER PER FOOT



STANDARD

MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
See also	AN385		

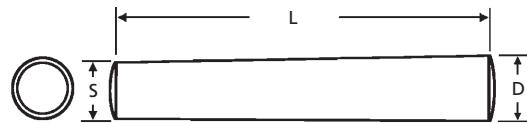

TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT		MATERIAL	
					NUMBER	LENGTH	Lbs. per 100 Pieces	Plain "TP-"
-01-0750	1	3/4	11/64	.156	.46			
-01-0875		7/8		.154	.53			
-01-1000		1		.151	.60			
-01-1250		1-1/4		.146	.74			
-01-1500		1-1/2		.141	.87			
-01-1750		1-3/4		.136	.99			
-01-2000		2		.130	1.08			
-01-2250		2-1/4		.125	1.16			
-01-2500		2-1/2		.120	1.23			
-01-2750		2-3/4		.115	1.29			
-01-3000		3		.110	1.36			
-01-3250		3-1/4		.104	1.95			
-01-3500		3-1/2		.099	2.10			
-01-3750		3-3/4		.094	2.25			
-01-4000		4		.089	2.40			
-02-0750	2	3/4	3/16	.177	0.59			
-02-0875		7/8		.175	0.67			
-02-1000		1		.172	0.76			
-02-1250		1-1/4		.167	0.92			
-02-1500		1-1/2		.162	1.07			
-02-1750		1-3/4		.157	1.22			
-02-2000		2		.151	1.36			
-02-2250		2-1/4		.146	1.49			
-02-2500		2-1/2		.141	1.61			
-02-2750		2-3/4		.136	1.72			
-02-3000		3		.131	1.83			
-02-3250		3-1/4		.125	2.47			
-02-3500		3-1/2		.120	2.66			
-02-3750		3-3/4		.115	2.85			
-02-4000		4		.110	3.04			
-03-0750	3	3/4	7/32	.203	0.78			
-03-0875		7/8		.201	0.89			
-03-1000		1		.198	1.02			
-03-1250		1-1/4		.193	1.20			
-03-1500		1-1/2		.188	1.43			
-03-1750		1-3/4		.183	1.63			
-03-2000		2		.177	1.83			
-03-2250		2-1/4		.172	2.00			
-03-2500		2-1/2		.167	2.20			

TP	DESCRIPTION	GENERAL USE	HOW TO IDENTIFY	APPLICATION	
				COMMON	TYPICAL PART NUMBER SEQUENCE: TPS-03-0750 is a #3 x 3/4" stainless steel tapered pin.
STANDARD	Solid cylindrical pin that has a uniform taper that runs the entire length of the pin. Tapered pins are held into place with dry friction making them easy to install and cost effective.		<ol style="list-style-type: none"> Verify solid pin with uniform 1/4" taper. Measure diameter (D). Measure length (L). Find the part in the chart above. 		Holding device in an injection assembly.

PERFORMANCE RESULTS VARY. YOUR PIN SELECTION SHOULD BE MADE BASED ON INDIVIDUAL APPLICATION.



ASSORTMENTS BEGIN

Page 286

168

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS

All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.


© G.L. Huyett 2004



TPM

METRIC


Page 276

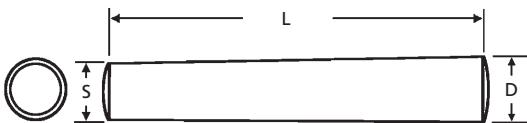

STANDARD

MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
See also	AN385		



TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT		MATERIAL
					See also	Lbs. per 100 Pieces	
3	NUMBER	LENGTH	7/32	.162 .157 .151 .146 .141 .136 .131 .125 .120 .115	2.36 2.50 2.64 2.78 2.91 3.04 4.34 4.59 4.85 5.10		
	-03-2750	2-3/4					
	-03-3000	3					
	-03-3250	3-1/4					
	-03-3500	3-1/2					
	-03-3750	3-3/4					
	-03-4000	4					
	-03-4250	4-1/4					
	-03-4500	4-1/2					
	-03-4750	4-3/4					
4	-03-5000	5	1/4	.234 .232 .229 .224 .219 .214 .208 .203 .198 .193	1.08 1.20 1.38 1.66 1.92 2.16 2.40 2.64 2.87 3.10		
	-04-0750	3/4					
	-04-0875	7/8					
	-04-1000	1					
	-04-1250	1-1/4					
	-04-1500	1-1/2					
	-04-1750	1-3/4					
	-04-2000	2					
	-04-2250	2-1/4					
	-04-2500	2-1/2					
5	-04-2750	2-3/4	19/64	.273 .268 .263 .258 .253 .247 .242 .237 .232	1.41 1.80 2.19 2.57 2.93 3.28 3.64 3.98 4.32		
	-04-3000	3					
	-04-3250	3-1/4					
	-04-3500	3-1/2					
	-04-3750	3-3/4					
	-04-4000	4					
	-04-4250	4-1/4					
	-04-4500	4-1/2					
	-04-4750	4-3/4					
	-04-5000	5					
5	-04-5250	5-1/4					
	-04-5500	5-1/2					
	-04-5750	5-3/4					
	-04-6000	6					
	-05-0750	3/4					
	-05-1000	1					
	-05-1250	1-1/4					
	-05-1500	1-1/2					
	-05-1750	1-3/4					
	-05-2000	2					
5	-05-2250	2-1/4					
	-05-2500	2-1/2					
	-05-2750	2-3/4					
	-05-3000	3					
	-05-3250	3-1/4					
	-05-3500	3-1/2					
	-05-3750	3-3/4					
	-05-4000	4					
	-05-4250	4-1/4					
	-05-4500	4-1/2					
5	-05-4750	4-3/4					
	-05-5000	5					
	-05-5250	5-1/4					

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS

All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.

TAPERED PINS

785-392-3017 FAX 785.392.2845

REVISED 06-04
www.huyett.com

1/4" TAPER PER FOOT




STANDARD

MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
-----------	---------	----------	---------

See also	AN385
----------	-------

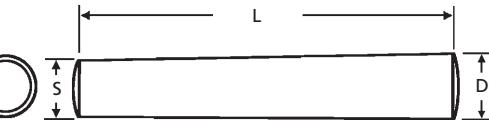

TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT		MATERIAL	
					NUMBER	LENGTH	Lbs. per 100 Pieces	Plain "TP-"
-05-5500	5	5-1/2	19/64	.175		9.90		
-05-5750		5-3/4		.169		10.35		
-05-6000		6		.164		10.80		
-05-6500		6-1/2		.154		11.70		
-05-7000		7		.143		12.60		
-06-0750		3/4		.325		2.00		
-06-1000		1		.320		2.58		
-06-1250		1-1/4		.315		3.15		
-06-1500		1-1/2		.310		3.70		
-06-1750		1-3/4		.305		4.23		
-06-2000		2		.299		4.73		
-06-2250		2-1/4		.294		5.22		
-06-2500	6	2-1/2	11/32	.289		5.70		
-06-2750		2-3/4		.284		6.17		
-06-3000		3		.279		6.61		
-06-3250		3-1/4		.273		6.99		
-06-3500		3-1/2		.268		7.36		
-06-3750		3-3/4		.263		7.72		
-06-4000		4		.258		8.06		
-06-4250		4-1/4		.253		8.40		
-06-4500		4-1/2		.247		8.73		
-06-4750		4-3/4		.242		9.05		
-06-5000		5		.237		9.38		
-06-5250		5-1/4		.232		9.67		
-06-5500		5-1/2		.227		9.95		
-06-5750		5-3/4		.221		10.20		
-06-6000		6		.216		10.50		
-06-6250		6-1/4		.211		16.13		
-06-6500		6-1/2		.206		16.77		
-06-6750		6-3/4		.201		17.42		
-06-7000		7		.195		18.06		
-07-1000	7	1	13/32	.388		3.70		
-07-1250		1-1/4		.383		4.53		
-07-1500		1-1/2		.378		5.34		
-07-1750		1-3/4		.373		6.12		
-07-2000		2		.367		6.88		
-07-2250		2-1/4		.362		7.63		
-07-2500		2-1/2		.357		8.37		
-07-2750		2-3/4		.352		9.10		

TP	DESCRIPTION	GENERAL USE	HOW TO IDENTIFY	APPLICATION	
				COMMON	TYPICAL PART NUMBER SEQUENCE: TP-07-1250 is a #7 x 1-1/4" plain tapered pin.
STANDARD	Solid cylindrical pin that has a uniform taper that runs the entire length of the pin. Tapered pins are held into place with dry friction making them easy to install and cost effective.		<ol style="list-style-type: none"> Verify solid pin with uniform 1/4" taper. Measure diameter (D). Measure length (L). Find the part in the chart above. 		Easy to install!

PERFORMANCE RESULTS VARY. YOUR PIN SELECTION SHOULD BE MADE BASED ON INDIVIDUAL APPLICATION.

ASSORTMENTS BEGIN

Page 286



170

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS

All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.

© G.L. Huyett 2004




METRIC
Page 276



1/4" TAPER PER FOOT


BOX 232 • MINNEAPOLIS, KS • 67467

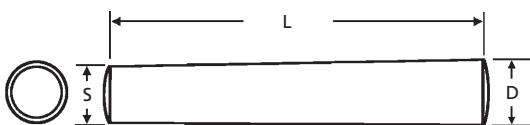

STANDARD

MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
See also	AN385		



TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT		MATERIAL
					Lbs. per 100 Pieces	Plain "TP-"	
-07-3000	7	3	13/32	.347	9.79		
-07-3250		3-1/4		.341	10.40		
-07-3500		3-1/2		.336	11.00		
-07-3750		3-3/4		.331	11.60		
-07-4000		4		.326	12.10		
-07-4250		4-1/4		.321	12.70		
-07-4500		4-1/2		.315	13.20		
-07-4750		4-3/4		.310	13.80		
-07-5000		5		.305	14.30		
-07-5250		5-1/4		.300	14.80		
-07-5500		5-1/2		.295	15.30		
-07-5750		5-3/4		.289	15.80		
-07-6000		6		.284	16.30		
-07-6250		6-1/4		.279	16.80		
-07-6500		6-1/2		.274	17.20		
-07-6750		6-3/4		.269	17.60		
-07-7000		7		.263	18.00		
-08-1000	8	1	1/2	.471	5.40		
-08-1250		1-1/4		.466	6.63		
-08-1500		1-1/2		.461	7.83		
-08-1750		1-3/4		.456	8.99		
-08-2000		2		.450	10.10		
-08-2250		2-1/4		.445	11.20		
-08-2500		2-1/2		.440	12.30		
-08-2750		2-3/4		.435	13.40		
-08-3000		3		.430	14.40		
-08-3250		3-1/4		.424	15.50		
-08-3500		3-1/2		.419	16.50		
-08-3750		3-3/4		.414	17.40		
-08-4000		4		.409	18.30		
-08-4250		4-1/4		.404	19.30		
-08-4500		4-1/2		.398	20.10		
-08-4750		4-3/4		.393	21.00		
-08-5000	9	5	19/32	.388	21.90		
-08-5250		5-1/4		.383	22.70		
-08-5500		5-1/2		.378	23.50		
-08-5750		5-3/4		.372	24.20		
-08-6000		6		.367	25.00		
-08-6250		6-1/4		.362	25.80		
-08-6500		6-1/2		.357	26.50		
-08-6750		6-3/4		.352	27.20		
-08-7000		7		.346	27.90		
-09-1000		1		.570	7.50		
-09-1250		1-1/4		.565	9.38		
-09-1500		1-1/2		.560	11.60		
-09-1750		1-3/4		.555	13.30		
-09-2000		2		.549	15.00		
-09-2250		2-1/4		.544	16.80		
-09-2500		2-1/2		.539	18.40		
-09-2750		2-3/4		.534	20.00		
-09-3000		3		.529	21.50		
-09-3250		3-1/4		.523	23.00		

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS


All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.

TAPERED PINS

785-392-3017 FAX 785.392.2845

REVISED 06-04
www.huyett.com

1/4" TAPER PER FOOT



STANDARD

MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
See also	AN385		


TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT Lbs. per 100 Pieces	MATERIAL	
						Plain "TP-"	Stainless "TPS-"
-09-3500	9	3-1/2	19/32	.518	24.50		
-09-3750		3-3/4		.513	26.00		
-09-4000		4		.508	27.40		
-09-4250		4-1/4		.503	28.90		
-09-4500		4-1/2		.497	30.30		
-09-4750		4-3/4		.492	31.60		
-09-5000		5		.487	33.00		
-09-5250		5-1/4		.482	34.30		
-09-5500		5-1/2		.477	35.60		
-09-5750		5-3/4		.471	36.90		
-09-6000		6		.466	38.10		
-09-6250		6-1/4		.461	39.30		
-09-6500		6-1/2		.456	40.40		
-09-6750		6-3/4		.451	41.50		
-09-7000		7		.445	42.60		
-10-1000	10	1	23/32	.685	10.90		
-10-1250		1-1/4		.680	13.63		
-10-1500		1-1/2		.675	16.35		
-10-1750		1-3/4		.670	19.08		
-10-2000		2		.664	21.80		
-10-2250		2-1/4		.659	24.20		
-10-2500		2-1/2		.654	26.50		
-10-2750		2-3/4		.649	28.80		
-10-3000		3		.644	31.10		
-10-3250		3-1/4		.638	33.40		
-10-3500		3-1/2		.633	35.70		
-10-3750		3-3/4		.628	37.90		
-10-4000		4		.623	40.10		
-10-4250		4-1/4		.618	42.20		
-10-4500		4-1/2		.612	44.30		
-10-4750		4-3/4		.607	46.40		
-10-5000		5		.602	48.40		
-10-5250		5-1/4		.597	50.40		
-10-5500		5-1/2		.592	52.30		
-10-5750		5-3/4		.586	54.20		
-10-6000		6		.581	56.00		
-10-6250		6-1/4		.576	57.80		
-10-6500		6-1/2		.571	59.60		
-10-6750		6-3/4		.566	61.30		
-10-7000		7		.560	63.00		

TP	DESCRIPTION	GENERAL USE	HOW TO IDENTIFY	APPLICATION	
				COMMON	TYPICAL PART NUMBER SEQUENCE: TP-10-4000 is a #10 x 4" stainless steel tapered pin.
STANDARD	Solid cylindrical pin that has a uniform taper that runs the entire length of the pin. Tapered pins are held into place with dry friction making them easy to install and cost effective.		<ol style="list-style-type: none"> Verify solid pin with uniform 1/4" taper. Measure diameter (D). Measure length (L). Find the part in the chart above. 		 Used for spring retention.

PERFORMANCE RESULTS VARY. YOUR PIN SELECTION SHOULD BE MADE BASED ON INDIVIDUAL APPLICATION.




Page 286



MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS


1/4" TAPER PER FOOT

BOX 232 • MINNEAPOLIS, KS • 67467

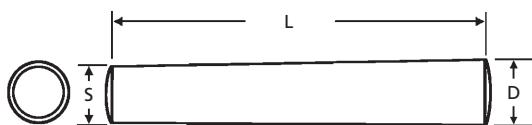**STANDARD****MANUFACTURER CROSS-REFERENCE**

ANSI/ASME B18.8.2 See also MS24692

See also AN385



TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT		MATERIAL
					Lbs. per 100 Pieces	Plain "TP-"	
-11-1000	11	+0.010/-0.010	55/64	.839	15.30		
					.834	19.13	
					.829	22.95	
					.824	26.78	
					.818	30.60	
					.813	34.43	
					.808	38.25	
					.803	42.08	
					.798	45.90	
					.792	49.73	
					.787	53.55	
					.782	57.38	
					.777	61.20	
					.772	65.03	
					.766	68.85	
					.761	72.68	
					.756	76.50	
					.751	80.33	
					.746	84.15	
					.740	87.98	
					.735	91.80	
					.725	99.45	
					.714	107.10	
					.704	114.75	
					.694	122.40	
					.673	137.70	
					.652	153.00	
					.631	168.30	
					.610	183.60	
-12-1000	12	+0.010/-0.010	1-1/32	1.011	22.00		
					1.006	27.50	
					1.001	33.00	
					.996	38.50	
					.990	44.00	
					.985	49.50	
					.980	55.00	
					.975	60.50	
					.970	66.00	
					.964	71.50	
					.959	77.00	
					.954	82.50	
					.949	88.00	
					.944	93.50	
					.938	99.00	
					.933	104.50	
					.928	110.00	
					.923	115.50	
					.918	121.00	
					.912	126.50	
					.907	132.00	
					.897	143.00	
					.886	154.00	

MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTSAll manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.

TAPERED PINS

785.392.3017 FAX 785.392.2845

REVISED 06-04
www.huyett.com


1/4" TAPER PER FOOT



STANDARD

MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
See also	AN385		

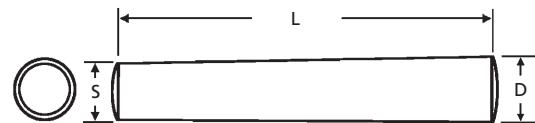

TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT	MATERIAL	
	NUMBER	LENGTH			Lbs. per 100 Pieces	Plain "TP-"	Stainless "TPS-"
-12-7500	12	7-1/2	1-1/32	.886	165.00		
-12-8000		8		.866	176.00		
-12-9000		9		.845	198.00		
-12-10000		10		.824	220.00		
-12-11000		11		.803	242.00		
-12-12000		12		.782	264.00		
-13-1000	13	1	1-15/64	1.220	31.00		
-13-1250		1-1/4		1.215	38.75		
-13-1500		1-1/2		1.210	46.50		
-13-1750		1-3/4		1.205	54.25		
-13-2000		2		1.199	62.00		
-13-2250		2-1/4		1.194	68.98		
-13-2500		2-1/2		1.189	77.50		
-13-2750		2-3/4		1.184	85.25		
-13-3000		3		1.179	93.00		
-13-3250		3-1/4		1.173	100.75		
-13-3500		3-1/2		1.168	108.50		
-13-3750		3-3/4		1.163	116.25		
-13-4000		4		1.158	124.00		
-13-4250		4-1/4		1.153	131.75		
-13-4500		4-1/2		1.147	139.50		
-13-4750		4-3/4		1.142	147.25		
-13-5000		5		1.137	155.00		
-13-5250		5-1/4		1.132	162.75		
-13-5500		5-1/2		1.127	170.50		
-13-5750		5-3/4		1.121	178.25		
-13-6000		6		1.116	186.00		
-13-6500		6-1/2		1.106	201.50		
-13-7000		7		1.095	217.00		
-13-7500		7-1/2		1.085	232.50		
-13-8000		8		1.075	248.00		
-13-9000		9		1.054	279.00		
-13-10000		10		1.033	310.00		
-13-11000		11		1.012	341.00		
-13-12000		12		.991	372.00		

TP	DESCRIPTION	GENERAL USE	HOW TO IDENTIFY	APPLICATION	
				COMMON	TYPICAL PART NUMBER SEQUENCE: TP-13-5000
TP	Solid cylindrical pin that has a uniform taper that runs the entire length of the pin. Tapered pins are held into place with dry friction making them easy to install and cost effective.		1. Verify solid pin with uniform 1/4" taper. 2. Measure diameter (D). 3. Measure length (L). 4. Find the part in the chart above.		Allows progressive alignment of holes.

PERFORMANCE RESULTS VARY. YOUR PIN SELECTION SHOULD BE MADE BASED ON INDIVIDUAL APPLICATION.




MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS

All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above. Prices, materials, tolerances, and grades subject to change without notice.



1/4" TAPER PER FOOT

BOX 232 • MINNEAPOLIS, KS • 67467

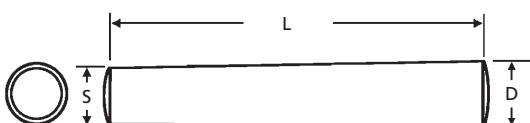

STANDARD

MANUFACTURER CROSS-REFERENCE

ANSI/ASME	B18.8.2	See also	MS24692
See also	AN385		



TP	Number	Length (L)	Nominal Diameter (D)	Small End Diameter (S)	WEIGHT		MATERIAL
					ANSI/ASME	Lbs. per 100 Pieces	
-14-1000		1		1.502	45.00		
-14-1250		1-1/4		1.497	56.25		
-14-1500		1-1/2		1.492	67.50		
-14-1750		1-3/4		1.487	78.75		
-14-2000		2		1.481	90.00		
-14-2250		2-1/4		1.476	100.13		
-14-2500		2-1/2		1.471	112.50		
-14-2750		2-3/4		1.466	123.75		
-14-3000		3		1.461	135.00		
-14-3250		3-1/4		1.455	146.25		
-14-3500		3-1/2		1.450	157.50		
-14-3750		3-3/4		1.445	168.75		
-14-4000		4		1.440	180.00		
-14-4250		4-1/4		1.435	191.25		
-14-4500		4-1/2		1.429	202.50		
-14-4750		4-3/4		1.424	213.75		
-14-5000		5		1.419	225.00		
-14-5250		5-1/4		1.414	236.25		
-14-5500		5-1/2		1.409	247.50		
-14-5750		5-3/4		1.403	258.75		
-14-6000		6		1.398	270.00		
-14-6500		6-1/2		1.388	292.50		
-14-7000		7		1.377	315.00		
-14-7500		7-1/2		1.367	337.50		
-14-8000		8		1.357	360.00		
-14-9000		9		1.336	405.00		
-14-10000		10		1.315	450.00		
-14-11000		11		1.294	495.00		
-14-12000		12		1.273	540.00		

14

TP	DESCRIPTION	GENERAL USE	HOW TO IDENTIFY	APPLICATION
	Solid cylindrical pin that has a uniform taper that runs the entire length of the pin. Tapered pins are held into place with dry friction making them easy to install and cost effective.	COMMON	<ol style="list-style-type: none"> Verify solid pin with uniform 1/4" taper. Measure diameter (D). Measure length (L). Find the part in the chart above. <p>TYPICAL PART NUMBER SEQUENCE: TP-13-5000 is a #13 x 5" plain tapered pin.</p>	 Available with slotted end for use with a screwdriver.

PERFORMANCE RESULTS VARY. YOUR PIN SELECTION SHOULD BE MADE BASED ON INDIVIDUAL APPLICATION.



MOST SIZES AVAILABLE IMMEDIATELY • \$2 LINE REQUESTED • CALL FOR QUANTITY DISCOUNTS

All manufacturer names and numbers are for identification purposes only. In no way are we implying that our parts were made by the manufacturers listed above.
Prices, materials, tolerances, and grades subject to change without notice.